



Fluoroflow®

All-fluoropolymer cartridge for aggressive applications

The Fluoroflow® filter cartridge is our standard product for aggressive wet etch and clean applications. It provides good flow rates and on-stream life at an economical cost. The all-fluoropolymer construction provides excellent chemical resistance for the most aggressive applications up to 150°C. It is available either ozone DI flushed and dried or wet-packed for quick installation.



Benefits

- Economical
- Wet-pack option for quick installation
- All-fluoropolymer for maximum chemical resistance
- 100% integrity tested for consistent quality

Applications

- Wet etch and clean
 - Phosphoric acid
 - Sulfuric acid
 - Hydrofluoric acid
 - Nitric acid
 - Piranha
 - SC1, SC2
 - NMP-based solvents
- Other high temperature or ozonated processes

Parker Hannifin Corporation provides our customers with unsurpassed product consistency and cost-efficiency. Our experienced professionals can help you select the right solution for your application. For more information or to place an order, contact your local distributor.

Parker Hannifin Corporation designs and manufactures an extensive line of innovative solutions for specific applications in the Microelectronics, Biopharmaceutical, Food and Beverage, Industrial and Chemical industries.

Fluoroflow®

Specifications

Materials of Construction

100% Fluoropolymer construction

Effective Filtration Area

6.8ft² (0.63m²) per nominal 10" (250mm) cartridge

Metals Extractables*

Standard: <20ppb (total)

Ultraclean: <5ppb (total)

*in a 10% HNO₃ extraction

Maximum Differential Pressure/ Temperature

Forward 80psid (5.5bar) @ 75°F (24°C)
 55psid (3.8bar) @ 167°F (75°C)
 30psid (2.0bar) @ 257°F (125°C)
 15psid (1.0bar) @ 300°F (150°C)

Reverse 50psid (3.4bar) @ 75°F (24°C)
 15psid (1.0bar) @ 250°F (121°C)

Cleanliness (particle shedding)

Wet-packed <2 particles/ml >0.2µm after 7gal at 1gal/min

TOC/Resistivity Rinse-up (wet-packed)


TOC recovery within 3-5ppb of feed without additional rinse-up. Resistivity recovery within 0.4megohm-cm of feed after 22gal @ 1gpm.

Performance Attributes

Water Flow rates, Typical *


0.05µm	0.9gpm/psid (4.9lpm/100mbar)
0.10µm	2.3gpm/psid (12.7lpm/100mbar)
0.20µm	3.2gpm/psid (17.6lpm/100mbar)
0.45µm	4.7gpm/psid (25.8lpm/100mbar)
1.00µm	6.7gpm/psid (36.9lpm/100mbar)

*Per 10" (250mm) cartridge equivalent

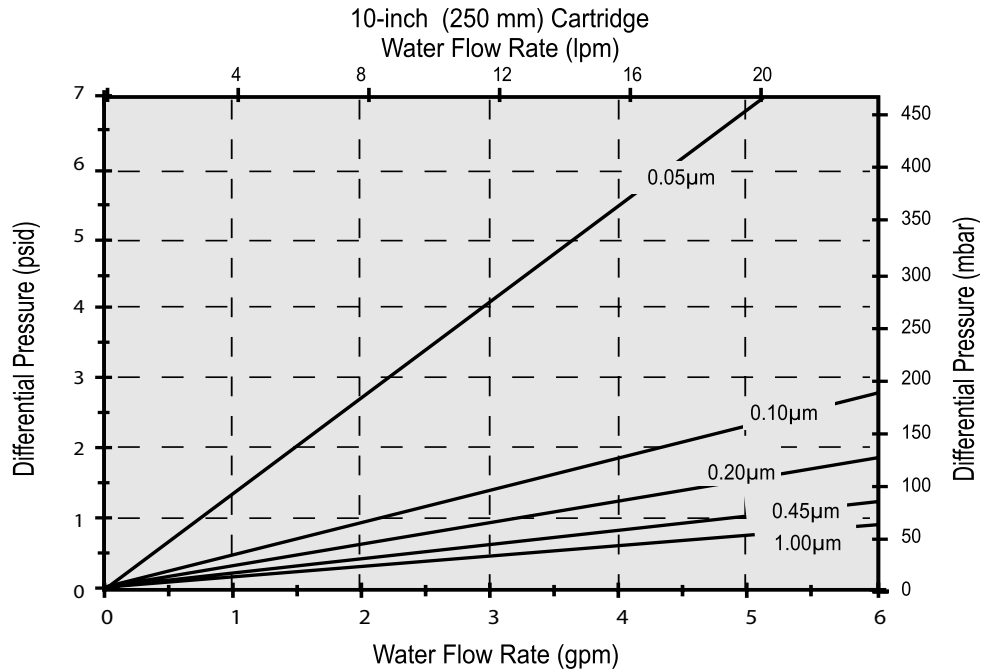

Ordering Information

Each cartridge is identified with a product number, pore size and lot number for traceability.

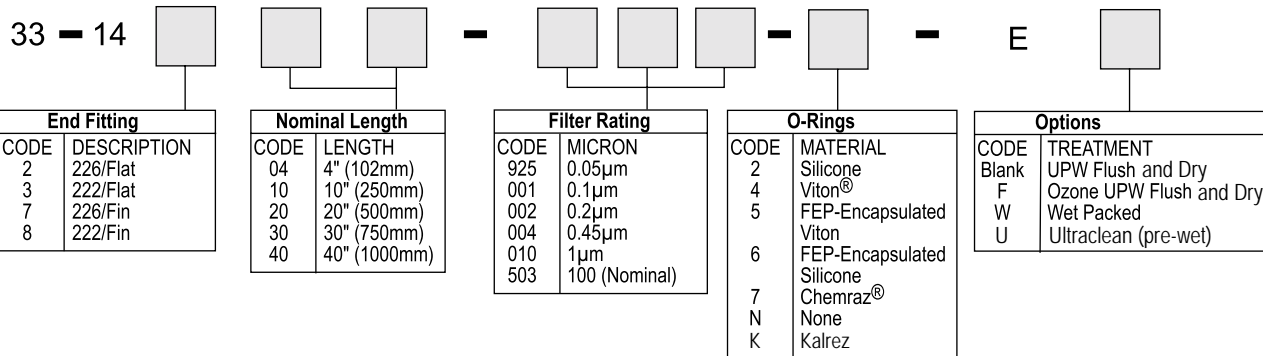

FLOW TECH CORPORATION
 (Toll Free) 877.375.1290
 7601 Stadium Drive Kalamazoo, MI 49009
www.flowtechfilters.com