



COAX™ Melt Blown Filter Series

Two Stage Depth Filter Cartridge

The COAX Depth Filter cartridge is an integral two stage depth filter. The first stage is made of nonwoven melt blown polypropylene to trap coarser particles. The second stage inner core is composed of a bicomponent polypropylene and polyethylene fiber to provide fine particle retention. This unique design provides a true graded density that offers a marked increase in useful life and dirt capacity. In addition, the rigid nature means there is no flexing of the cartridge and greatly reducing media migration and particle unloading.

Filter Features–Benefits

- Two stage graded density melt blown depth filter
Maximizes dirt holding and useful life
- Inert pure polyolefin construction, non-shedding media
- Broad chemical compatibility
- Low extractables
- Meets USP Class VI standards – Acceptable for use in food, beverage and pharmaceutical applications
- Extensive range of lengths and configurations
- FDA listed materials of construction

Applications

- Paint
- Perfumes
- Cutting Oils
- CMP Slurries
- Magnetic Slurries
- Corn Syrup
- Plating Solutions
- Pre R.O.
- Coatings

COAX Filter Specifications

Media:	Thermally bonded Polypropylene/polyethylene fiber
End caps:	Polypropylene (when used)
Gaskets/O-Rings:	Silicone, Viton, EPDM, Buna-N
Micron ratings:	0.5, 1, 3, 5, 10, 25, 50, 100, 150µm
Dimensions and Operating Parameters	
Nominal lengths:	9.75", 10", 20", 30", 40" (24.8, 25.4, 50.8, 76.2, 101.6 cm)
Outside diameter:	2.6" (6.5 cm)
Inside diameter:	1.0" (2.54 cm)
Maximum operating temperature:	140°F (60°C)
Maximum operating pressure:	100 psid @ 70°F (7 bar @ 21°C) 2 psid @ 176°F (0.14 bar @ 80°C)



Filter Removal Efficiency

Beta Ratio Efficiency	Beta 100 99%	Beta 20 95%	Beta 10 90%
0.5 micron	4.0	2.0	0.5
1.0 micron	8.0	3.0	1.0
3.0 micron	12.0	5.0	3.0
5.0 micron	20.0	8.0	5.0
10.0 micron	30.0	13.0	10.0
25.0 micron	50.0	30.0	25.0
50.0 micron	100.0	60.0	50.0
100.0 micron	200.0	125.0	100.0
150.0 micron	250.0	200.0	150.0

Performance Specifications


Sanitization

Hot water at 176°F (80°C) at 5 psid (0.35 bar) for 30 min.
Autoclavable at 257°F (125°C) for 30 min. (Basic DOE configuration)

COAX Nomenclature Information

<p>COAX</p> <p>Filter Type COAX Series Filters</p>	<p>25</p>	<p>-40</p> <p>Nominal Length (inches)</p> <p>-10 -20 -30 -40</p>	<p>RL</p> <p>Length Option</p> <p>Blank Standard length RL Reduced length</p>	<p>P3</p>	<p>B</p> <p>Gasket or O-Ring</p> <p>S Silicone B Buna-N E EPDM V Viton T Teflon encap. Viton (O-Rings only) N None</p>
<p>Retention Rating (microns)</p> <p>0.5 1 3 5 10 25 50 100 150</p>				<p>End Configuration</p> <p>P Double Open End (hard end caps) P2 226/Flat Single Open End P3 222/Flat Single Open End P6 Self-Seal Spring on One End P7 226/Fin Single Open End P8 222/Fin Single Open End N None PX Extended Core AM Single open end, internal O-Ring</p>	

Example: COAX 25-40RL P3B

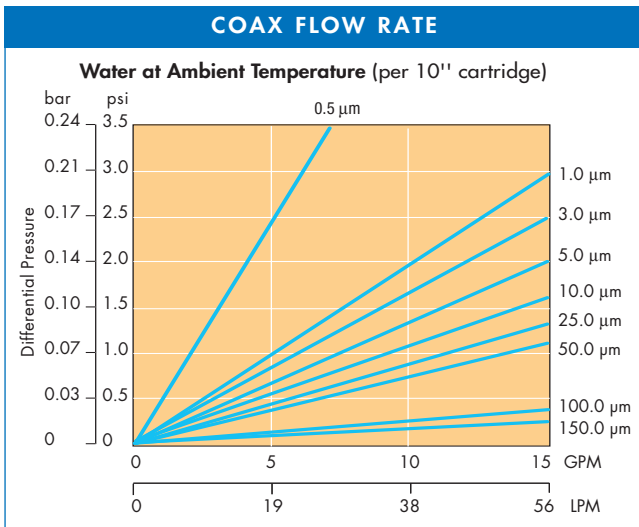

FLOW TECH CORPORATION

(Toll Free) **877.375.1290**

7601 Stadium Drive Kalamazoo, MI 49009

www.flowtechfilters.com

DISTRIBUTED BY:

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

COAX is a trademark of Graver Technologies, LLC.