



MBF™ Melt Blown Filter Series

Melt Blown Filters

An economical, disposable, filter element that can be used in a wide range of applications. The MBF depth filter is constructed of 100% polypropylene media for chemical compatibility with a variety of process fluids.

Filter Features–Benefits

- Available in nominal ratings from 1 to 75 microns
- Graded pore construction for long on-stream life
- Melt blown media resists dirt unloading as differential pressure increases
- Non-shedding, fibrous center core
- High dirt holding capacity
- FDA listed polypropylene media
- Economical depth filtration
- Thermal bonded endcaps optional
- Free of binders, adhesives and surfactants

Applications

- Food & beverage
- Aqueous solutions
- Chemicals
- Blowdown post filter
- Wastewater
- Rad waste
- Magnetic tape coatings
- RO Prefilters
- Ink

Filter Specifications


Media:	Polypropylene
End caps:	Polypropylene
Gaskets/O-Rings:	Silicone, Viton, EPDM, Buna-N
Micron ratings:	1, 3, 5, 10, 20, 30, 50, 75µm
Dimensions and Operating Parameters	
Typical nominal lengths:	9.75", 10", 20", 30", 40" (24.8, 25.4, 50.8, 76.2, 101.6 cm) Other lengths available
Outside diameter:	2.5" (6.35 cm), 2.75" (6.99 cm) Endcapped
Inside diameter:	1.0" (2.54 cm)
Maximum differential pressure:	50 psid @ 70 °F (3.45 bar @ 21°C) 25 psid @ 140 °F (1.72 bar @ 60°C)
Recommended change-out pressure for disposal:	35 psid (2.4 bar)

FDA listed materials

All polypropylene material used in manufacturing complies with the regulations of the Food and Drug Administration (FDA) title 21 of the Code of Federal Regulations Sections 174.5, 177.1520, and 177.1630, as applicable for food and beverage contact.



MBF FLOW RATE VS PRESSURE DIFFERENTIAL

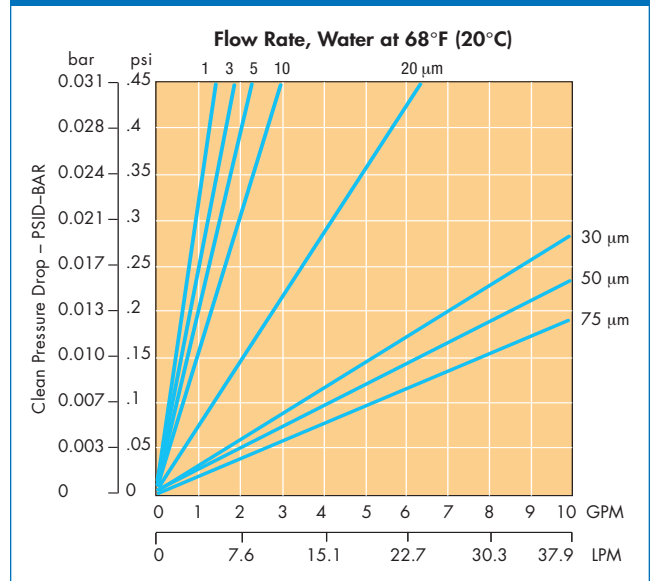

MBF Nomenclature Information

MBF Nomenclature Information				
MBF Filter Type MBF Series Filters	10	-20 Nominal Length (inches) -9.75 -10 -19.5 -20 -29.25 -30 -39 -40	N	N Gasket or O-Ring S Silicone B Buna-N E EPDM V Viton T Teflon encap. Viton (O-Rings only) N None
Retention Rating (microns) 1 3 5 10 20 30 50 75			End Configuration P Double Open End (hard endcaps) P2 226/Flat Single Open End P3 222/Flat Single Open End P6 Self-Seal Spring on One End P7 226/Fin Single Open End P8 222/Fin Single Open End PX Extended Core N None (Cut ends) DBG Direct Bond Gaskets	

Example: MBF 10-20 NN



DISTRIBUTED BY:

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. MBF is a trademark of Graver Technologies, LLC.

