



QMC™ Polypropylene Filter Series

High Efficiency Polypropylene Filter Cartridge

An innovative product manufactured with multiple layers of melt blown polypropylene media. This unique structure allows high flow rates while maintaining low differential pressure and ideal depth filtration characteristics.

Filter Features–Benefits

- Micron ratings from 0.1 to 10 µm– Broad application range
- Meets current USP Class VI biological test for plastics
- FDA listed materials of construction
- High Filtration Efficiency – 95%
- Graded pore structure – Multilayer, media for high dirt holding capacity
- Fixed pore construction – Resists dirt unloading at maximum differential pressure
- Polypropylene construction – Inert to many process fluids
- Various Gasket/O-ring materials – Compatible with many fluids

Filter Specifications

Construction material:	Polypropylene
Gasket/O-Rings:	Buna-N, EPDM, Silicone, Viton, Teflon Encapsulated Viton (O-Rings only)
Micron ratings:	0.1, 0.2, 0.4, 0.6, 1.0, 3.0, 5.0, 10.0µm
Dimensions and Operating Parameters	
Nominal lengths:	9.75", 10", 20", 30", 40" (24.8, 25.4, 50.8, 76.2, 101.6 cm)
Outside diameter:	2.7" (6.9 cm)
Inside diameter:	1.0" (2.54 cm)
Maximum operating temperature:	176 °F (80°C)
Maximum differential pressure:	80 psid @ 70°F (5.5 bar @ 21°C) 40 psid @ 176°F (2.8 bar @ 80°C)
Maximum reverse differential pressure:	40 psid @ 70°F (2.8 bar @ 21°C)
Recommended changeout pressure:	35 psid (2.4 bar)

Applications

- Food & beverage
- Aqueous solutions
- Pharmaceuticals
- Ultrapure water
- RO Prefilters
- Chemicals
- Cosmetics
- Ink
- DE trap
- Photoresists



Filter Removal Efficiency

Beta Ratio Efficiency	Beta 100 99%	Beta 20 95%
0.1 micron	0.8	0.1
0.2 micron	1.0	0.2
0.4 micron	2.0	0.4
0.6 micron	3.0	0.6
1.0 micron	6.0	1.0
3.0 micron	14	3.0
5.0 microns	17	5.0
10.0 microns	25	10.0

Performance Specifications

Sanitization

Hot water at 176°F (80°C) at 5 psid (0.35 bar) for 30 min.
In-line steam at 257°F (125°C) at 1 psid (0.07 bar) for 30 min.
Autoclavable at 257°F (125°C) for 30 min.


FDA Listed Materials

All materials comply with FDA title 21 of the Code of Federal Regulations as applicable for food and beverage contact.

QMC Nomenclature Information

<p style="text-align: center;">QMC</p> <p>Filter Type QMC Series Filters</p>	<p style="text-align: center;">0.6</p> <p style="text-align: center;">Retention Rating (microns)</p> <p style="text-align: center;">0.1 0.2 0.45 0.6 1 3 5 10</p>	<p style="text-align: center;">-10</p> <p style="text-align: center;">Nominal Length (inches)</p> <p style="text-align: center;">-9.75 -10 -20 -30 -40</p>	<p style="text-align: center;">P2</p> <p style="text-align: center;">T</p> <p style="text-align: center;">Gasket or O-Ring</p> <p>S Silicone B Buna-N E EPDM V Viton T Teflon encap. Viton (O-Rings only)</p> <p style="text-align: center;">End Configuration</p> <p>P Double Open End P2 226/Flat Single Open End P3 222/Flat Single Open End P7 226/Fin Single Open End P8 222/Fin Single Open End PX Extended Core AM Single open end, internal O-Ring NPC Double open end, internal O-Ring</p>
--	---	--	--

Example: QMC 0.6-10 P2T

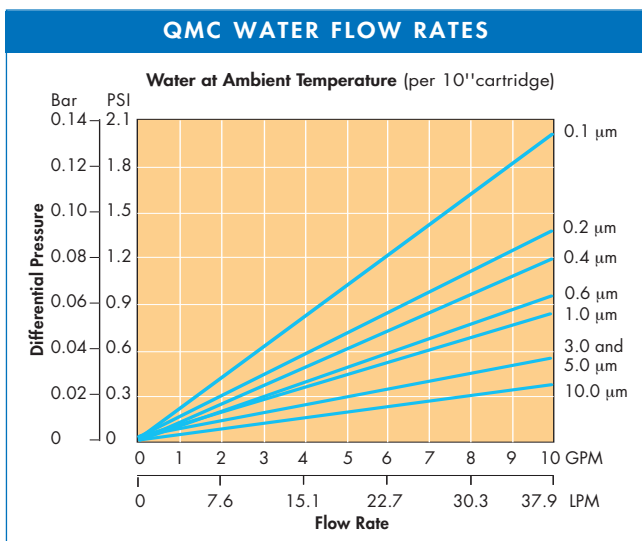

FLOW TECH
CORPORATION

(Toll Free) **877.375.1290**

7601 Stadium Drive Kalamazoo, MI 49009

www.flowtechfilters.com

DISTRIBUTED BY:

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

QMC is a trademark of Graver Technologies, LLC.

