


## Series 740B High Throughput Filter Cartridges

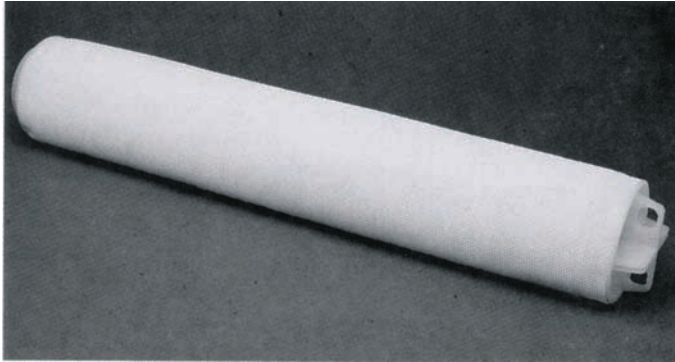

### FEATURES, ADVANTAGES AND BENEFITS

Series 740B High Throughput Filter Cartridge, which incorporates the patented radial pleat, puts an extraordinary amount of surface area into a single cartridge. This results in the following:

- ◆ High loading capacity for long life and lower cost filtration.
- ◆ Fewer cartridges for fewer change-outs and lower labor cost.
- ◆ Fewer seals, reduced risk of bypass resulting in high quality filtration.
- ◆ Extremely low disposal costs, less than a tenth of some cartridges.

Double O-ring seals in a variety of material options means:

- ◆ Extremely low risk of bypass for high quality fluids.
- ◆ No loose parts to assemble for easy installation, thus less labor cost.
- ◆ No springs and caps to lose reduces the risk of bypass.
- ◆ Broad chemical compatibility for many applications.
- ◆ Convenient handle for easy manual or mechanical removal.

### APPLICATIONS

#### Prefilters or Final Filters for:

- Acids and bases
- Amines
- Carbon beds
- Completion fluids
- Deep wells
- Desalination
- DI resins
- EDM Fluids
- Glycol
- Groundwater clean-up
- Laundry water
- Machine coolants
- Makeup water
- Organic solvents
- Photo chemicals
- Plating solutions
- RO membranes
- Storm Water
- UF membranes
- Wastewater
- Waterflood
- Workover fluids

### MATERIALS OF CONSTRUCTION

#### Filter Media:

Melt blown polypropylene microfiber filter media provides high particle removal efficiency for high quality filtration with broad chemical compatibility.

No silicone is intentionally used in materials of construction or in manufacturing.

The raw materials composing these filters are FDA compliant according to CFR Title 21.

#### O-rings:

Model Number	Material
7010	FDA Buna N (standard)
Other O-rings are available, please consult factory	

### PERFORMANCE DATA

#### Loading Capacity

Model Number	742B	743B	744B	745B	746B	747B	748B	749B
Pounds at 40 gpm	16.1	21	23.5	23.8	23.5	24	24	24
Kilograms at 9 cu m/hr	7.3	9.5	10.7	10.8	10.7	11	11	11

**Loading:** The data above shows typical loading capacities of the different micron rated filters. Loading capacity is determined by challenging a filter with a dispersion of silica test dust in water at the recommended flow rate. Pressure drop is monitored and testing is terminated at 50 psid (3.4 bar). 742B is terminated at 35 psid (2.4 bar). The loading capacity reported is the dry weight gain of the bag.

#### Particle Removal Efficiency (microns)

Model Number	742B	743B	744B	745B	746B	747B	748B	749B
Efficiency @99%	1	2	5	10	15	25	40	70
Efficiency @95%	0.9	1.1	2.5	8	9	13	24	43
Efficiency @90%	0.8	0.9	1.7	6	8	10	19	35
Efficiency @75%	<0.7	0.7	1.5	3.5	6	8	13	24
Efficiency @50%	<0.7	<0.7	1.1	1.5	4.0	4.5	8	14

**Efficiency:** The Series 740B High Throughput Filter Cartridges are rated using a silica test challenge in water at 40 gpm (9 cu m/hr). The results reported are typical initial efficiencies taken within ten minutes of the start of the test.

**Clean Pressure Drop Versus Flow Rate (psid)**

Model Number	742B	743B	744B	745B	746B	747B	748B	749B
$\Delta p$ @ 20 gpm	0.6	0.4	0.2	0.1	0.1	0.1	0.08	0.06
$\Delta p$ @ 40 gpm	1.1	0.8	0.4	0.3	0.2	0.2	0.16	0.13
$\Delta p$ @ 60 gpm	2.2	1.1	0.5	0.4	0.3	0.3	0.25	0.20
$\Delta p$ @ 80 gpm	2.9	1.5	0.7	0.6	0.4	0.4	0.33	0.27

**Pressure Drop:** The Series 740B High Throughput Filter Cartridges have low initial pressure drop ( $\Delta p$ ) in water, as the table indicates. The table does not include the pressure drop of the vessel.

**OPERATING CONDITIONS**

Maximum Operating Temperature	160° F (70° C)
Recommended Flow (in water)	40 gpm ( 9 cu m/hr)
Maximum Flow (in water):	
742B & 743B	60 gpm (14 cu m/hr)
744B – 749B	80 gpm (18 cu m/hr)
Maximum Differential Pressure:	
742B	35 psid (2.4 bar)
743B – 749B	50 psid (3.4) bar

**Disposal**

Disposal of used filter bags must comply with applicable federal, state and local laws and regulations.

**PRODUCT SPECIFICATIONS**

Model Number	Micron Rating Initial Efficiency	Part Number	NSF/ANSI Standard 61	Length	Outer Diameter	Cartridges per Case
742B	1 micron @ 99%	70-0708-1552-0	See NSF note below	39 in (100 cm)	6.5 in (16.5 cm)	1
743B	2 micron @ 99%	70-0702-3124-9				
744B	5 micron @ 99%	70-0702-3125-6				
745B	10 micron @ 99%	70-0702-3126-4				
746B	15 micron @ 99%	70-0702-3127-2				
747B	25 micron @ 99%	70-0706-2356-9	No			
748B	40 micron @ 99%	70-0706-2357-7				
749B	70 micron @ 99%	70-0706-2358-5				

**WARRANTY**

Seller warrants its equipment against defects in workmanship and material for a period of 12 months from date of shipment from the factory under normal use and service and otherwise when such equipment is used in accordance with instructions furnished by Seller and for purposes disclosed in writing at the time of purchase, if any. Any unauthorized alteration or modification of the equipment by Buyer will void this warranty. Seller's liability under this warranty shall be limited to the replacement or repair, F.O.B. point of manufacture, of any defective equipment or part which, having been returned to the factory, transportation charges prepaid, has been inspected and determined by the Seller to be defective.

THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EITHER EXPRESSED OR IMPLIED, AS TO DESCRIPTION, QUALITY, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR USE, OR ANY OTHER MATTER. Under no circumstances shall Seller be liable to Buyer or any third party for any loss of profits or other direct or indirect costs, expenses, losses or consequential damages arising out of or as a result of any defects in or failure of its products or any part or parts thereof or arising out of or as a result of parts or components incorporated in Seller's equipment but not supplied by the Seller.

**Important Notice**

CUNO MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Since a variety of factors can affect the use and performance of a CUNO product in a particular application, some of which are uniquely within the user's knowledge and control, user is responsible for determining whether or not the CUNO product is fit for a particular purpose and suitable for user's method of application.

**Limitation of Remedies and Liability**

If the CUNO product is proved to be defective, THE EXCLUSIVE REMEDY, AT CUNO'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OR TO REPAIR OR REPLACE THE DEFECTIVE PRODUCT. CUNO shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including, but not limited to, contract, negligence, warranty or strict liability.



Component

740B Series Filter Models 742B, 743B, 744B, 745B, and 746B are tested and certified by NSF International against NSF/ANSI Standard 61 for material requirements only.





(Toll Free) **877.375.1290**  
7601 Stadium Drive Kalamazoo, MI 49009  
[www.flowtechfilters.com](http://www.flowtechfilters.com)

